


LD102-36xA2W Str Micro-Controller Menu

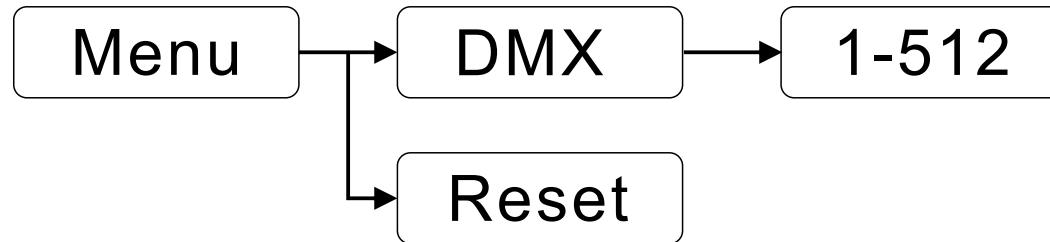

DMX Channels:

DMX Channels	Value	Function
1	0-7	No Function 无效果
	8-214	Strobe Slow->Fast 频闪 从慢到快
	215-255	Random Strobe 随机频闪
2	0-255	Main Brightness 总亮度
3	0-255	Cool White Brightness 6000K 冷白色亮度
4	0-255	Amber Brightness 琥珀色亮度
5	0-255	Warm White Brightness 3200K 暖白色亮度